

# Iso-Flo® Size Grader

Size grade your product with industry proven [Iso-Flo® Size Graders](#). Conveying as they size-grade product, Iso-Flo® Size Graders are the workhorses of the industry, with unsurpassed capacity and reliability.

## Greater Accuracy

- Improved grading accuracy
- More separate grades available

## Higher Capacities


- Three-decks, 14-screens: 18,144 kg/h (40,000 lb/hr)
- Capacities vary depending on product and product condition

## Versatility

- Install on mezzanines and decks
- More designs and options
- More product applications
- More screen combinations and number of screens
- 1219 mm, 914 mm, and 610 mm (48", 36" and 24") wide

## More Screen Area

- Larger selection of screens per deck
- 1219 mm (48") width—more square feet of grading

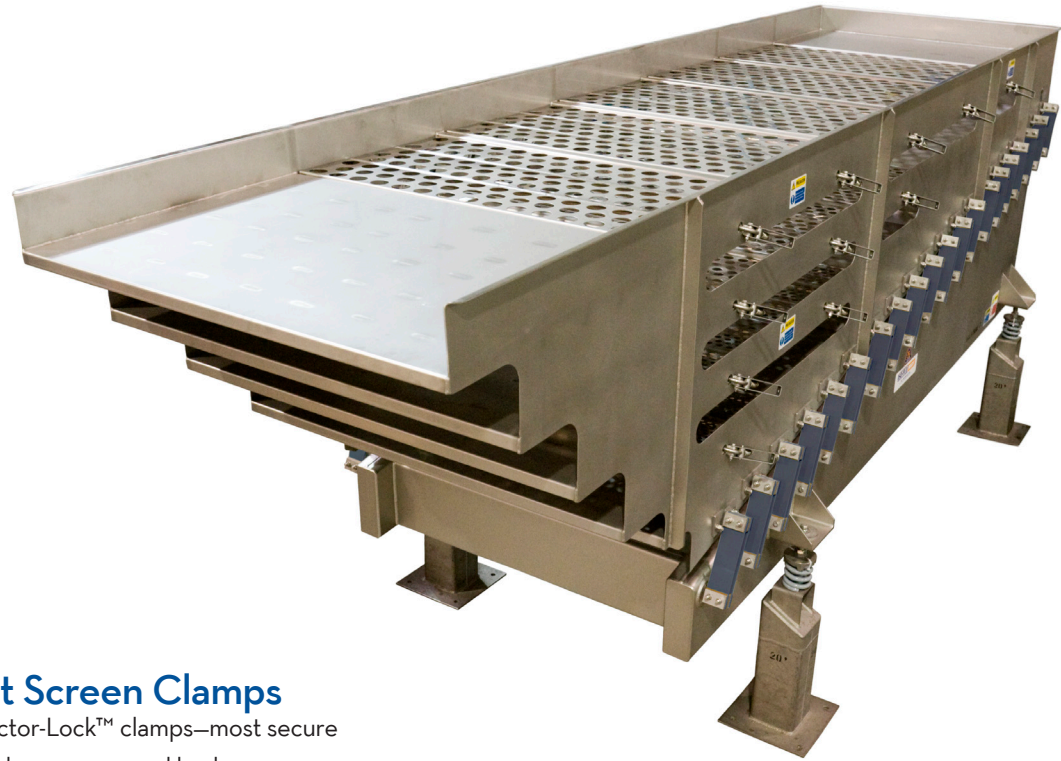

## Best Screen Clamps

- Vector-Lock™ clamps—most secure
- Reduce screen and bed wear
- Quieter—no loose screens

## Sanitary

- Single beam frames
- Sanitary screen designs
- Easy, quick access for cleanup

## Clearing Operation

- One speed and stroke to grade
- Another speed and stroke to clear the screens
- Speeds and strokes custom set for the application
- Allows automated and timed self-cleaning of screen and pan

**Key Technology**


150 Avery Street • Walla Walla, WA 99362 • USA

Phone: 509.529.2161 • Fax: 509.527.1331 • [product.info@key.net](mailto:product.info@key.net) • [www.key.net](http://www.key.net)



## Options

- Smooth or rigidized stainless steel screens and deadplates
- Stainless steel frames
- Standard discharge styles:
  - Combine first and second decks; third deck ends short (2 grades + shorts); conveying fourth deck ends short
  - Separate first, second, and third decks (3 grades + shorts); conveying fourth deck ends short
  - Combine first, second, and third decks (1 grade + shorts); conveying fourth deck ends short
  - Others by special order
- Optional infeed styles:
  - Straight 152 mm (6") extended
  - Straight 305 mm (12") extended
  - Straight 457 mm (18") extended
  - 1676 mm (66") wide flared, 305 mm (12") extended
  - 1676 mm (66") wide flared, 457 mm (18") extended
- Stainless steel support columns
- Manual dropout gates
- Bias discharge

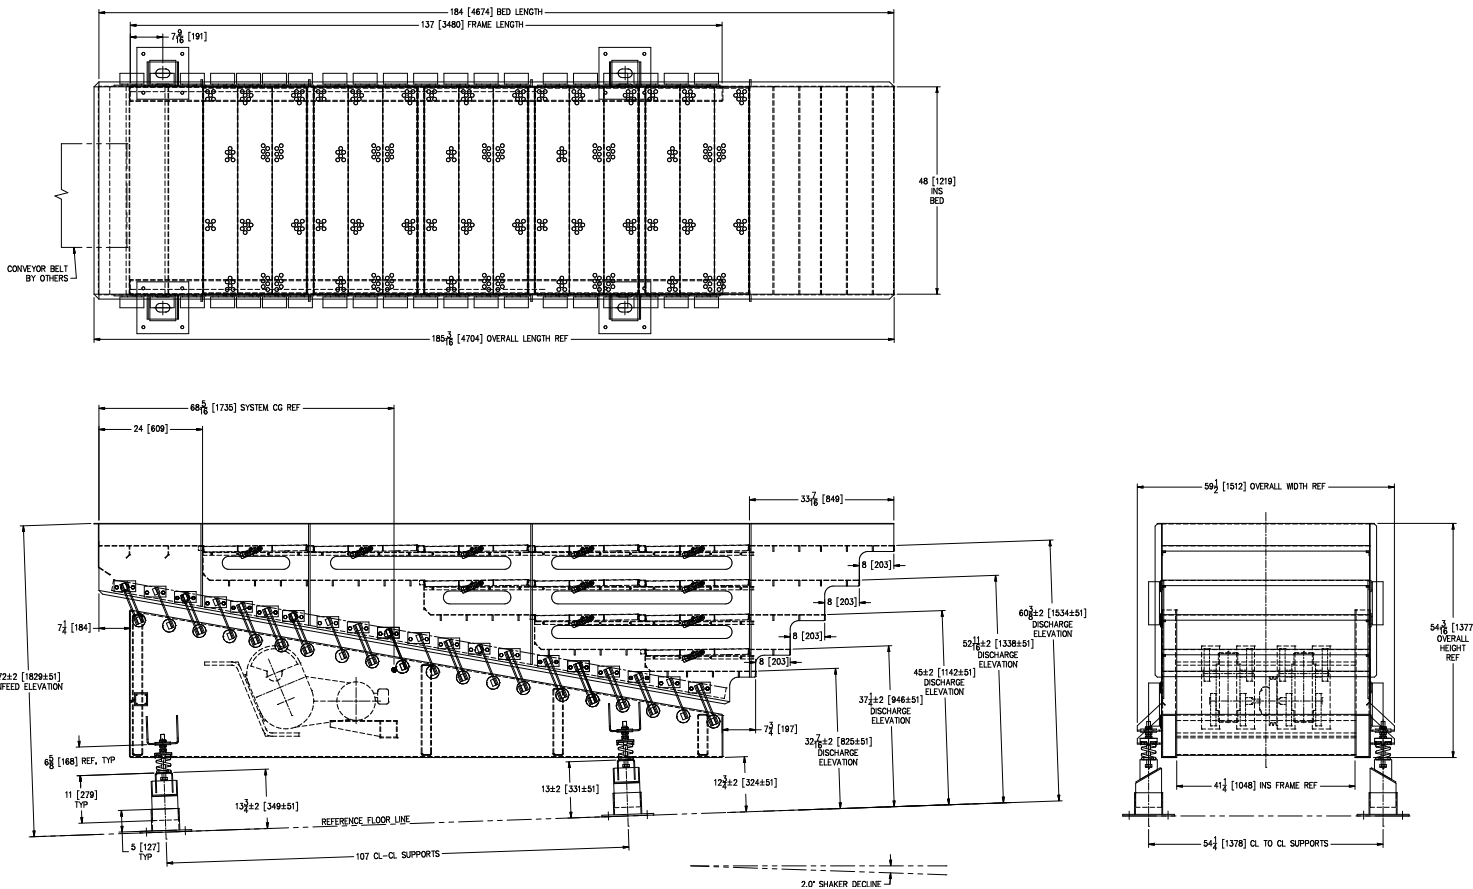

## Common Product Applications

- Beans—green, lima
- Beef, pepperoni—sliced
- Berries, cranberries
- Broccoli, cauliflower
- Carrots
- Cereal
- Chemicals
- Cherries
- Coffee beans
- Corn—cut, whole
- Cucumbers, pickles
- French fry strips
- Fruit—cut, whole
- Garlic
- Glass, plastics
- Grapes
- Minerals, rocks, sand
- Nuts, seeds
- Olives
- Onions
- Pears
- Peas—green, snap
- Pineapple—cut
- Potato chips, crisps
- Potatoes—cut, whole
- Prunes
- Radishes
- Raisins
- Snacks
- Vegetables—cut, whole

Call Key to find out about how your products may benefit from this technology or another system.